



3E0661-1NS

Overview


The 0661 keyswitch offers high reliability at an economical price. Maintained contact, providing 1 x normally open and 1 x normally closed contact.

Key is removable in both positions. This keyswitch is keyed alike as standard, keyed to differ versions are also available.

Legends are laser etched, ensuring permanent and clear text. Custom legends are available to special order. Our in-house department guarantees a rapid and efficient response to your specific requirements.

This product is supplied flush mount, complete with two keys, electrical backbox, instructions and fixing screws.

Dimensions (mm) :

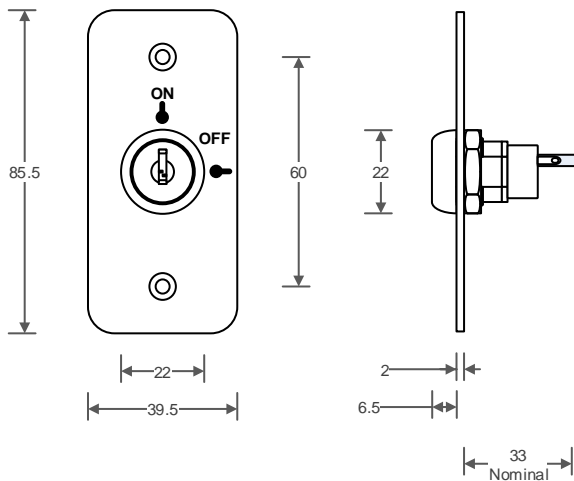


- 2 Position
- Maintained Contact
- Keyed Alike as Standard
- 2 Keys Supplied
- Laser Etched Legend

IMPORTANT: This product is for use in 12Vdc and 24Vdc applications only and should only be installed by a qualified person

Technical (switch)

Contact Resistance	20mΩ Max, 10,000mΩ Min
Life	6,000 Cycles at full load
Operating temperature	-30 °C to +85° C
Dialectic Strength	1000 V RMS Min
Keys	90° Removable in both positions

Circuit Form & Key Index:

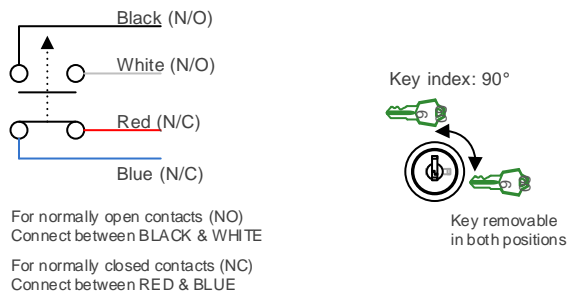

Specification: (panel)

Material	Grade 301 DP1 Stainless Steel
Legend	ON/OFF

Ordering information:

3E0661-1NS

Keyswitch, maintained contact, NS, SSS, laser etched ON/OFF, key:606