



3E0661-1WR

**Overview**

The 3E0661-WR keyswitch rated at IP67 is ideal for harsh outdoor applications. Suitable for marine environment exposure to severity one (EN60068-2-52). For continued exterior use, the lock must be regularly lubricated with oil. To maintain the IP rating – a suitable sealant or gasket (3E0600-EGK) for the rear plate is required.


The keyswitch has a maintained contact where the key is removable in both positions. The keyswitch is keyed alike as standard, key to differ are available to special order.

The standard legend is laser etched ON and OFF, custom legends and logos are available to special order.

The keyswitch is mounted on grade 304 DP1 2mm stainless steel.

This product is supplied flush mount with two keys, electrical backbox, fixings and wiring detail.

**Dimensions (mm) :**

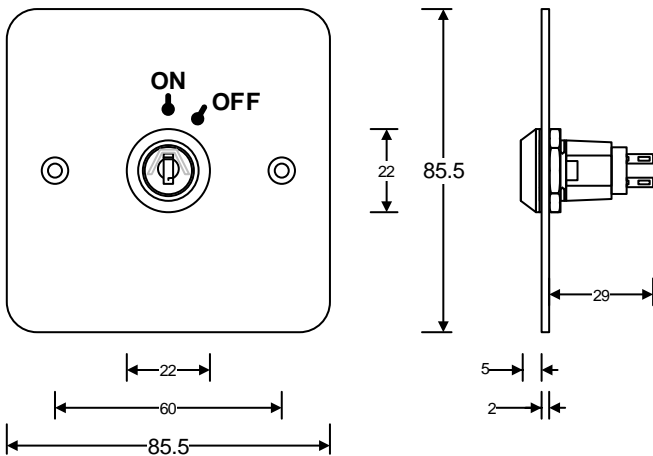

- IP67 Ingress Protection
- Maintained Contact
- 2 Position
- 2 Keys Supplied
- Laser Etched Legend
- RoHS Compliant

**Technical (switch)**

Contact Resistance	<20mΩ
Voltage Proof	1,500Vac
Operating temperature	-30 °C to +85° C
Life	>10,000 Cycles
Indexing	Key removable at 60° or 90°
Ingress Protection	IP67
Switch Rating	1A @ 24Vdc

**Specification: (panel)**

Material	Grade 304 DP1 Stainless Steel
Legend	ON/OFF

**Ordering information:**

3E0661-1WR

Maintained keyswitch, IP67 frontal protection c/w 2 no 901 keys, 1 Gang, SSS, Laser etched ON/OFF