



3E0661-1NSWR

Overview

The 3E0661-NSWR keyswitch rated at IP67 is ideal for harsh outdoor applications. Suitable for marine environment exposure to severity one (EN60068-2-52). For continued exterior use, the lock must be regularly lubricated with oil. To maintain the IP rating – a suitable sealant or gasket (3E0600-EGK-NS) for the rear plate is required.


The keyswitch has a maintained contact where the key is removable in both positions. The keyswitch is keyed alike as standard, key to differ are available to special order.

The standard legend is laser etched ON and OFF, custom legends and logos are available to special order.

The keyswitch is mounted on grade 304 DP1 2mm stainless steel.

This product is supplied flush mount with two keys, electrical backbox, fixings and wiring detail.

Dimensions (mm) :

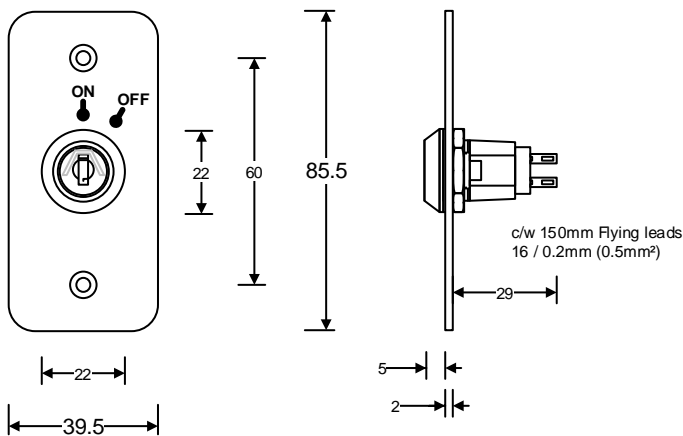

- IP67 Ingress Protection
- Maintained Contact
- 2 Position
- 2 Keys Supplied
- Laser Etched Legend
- RoHS Compliant

Technical (switch)

| | |
|-----------------------|-----------------------------|
| Contact Resistance | <20mΩ |
| Voltage Proof | 1,500Vac |
| Operating temperature | -30 °C to +85° C |
| Life | >10,000 Cycles |
| Indexing | Key removable at 60° or 90° |
| Ingress Protection | IP67 |
| Switch Rating | 1A @ 24Vdc |

Specification: (panel)

| | |
|----------|-------------------------------|
| Material | Grade 304 DP1 Stainless Steel |
| Legend | ON/OFF |

Ordering information:

3E0661-1NSWR

Maintained keyswitch, IP67, c/w 2 no 901 keys, NS, SSS, c/w gasket Laser etched ON/OFF