



3E0663-1NS

**Overview**


The 0663 keyswitch offers high reliability at an economical price. 3 position maintained contact, providing 1 x normally open, 1 x normally closed circuit and 1 x common in each position.

Key is removable in all positions. Keyswitches are keyed alike as standard, keyed to differ versions are also available.

Legends are laser etched ensuring permanent and clear text. Custom legends are available to special order. Our in-house laser department guarantees a rapid and efficient response to your specific requirements.

Products are supplied flush mount, complete with two keys, electrical backbox, instructions and fixing screws.

**Dimensions (mm) :**

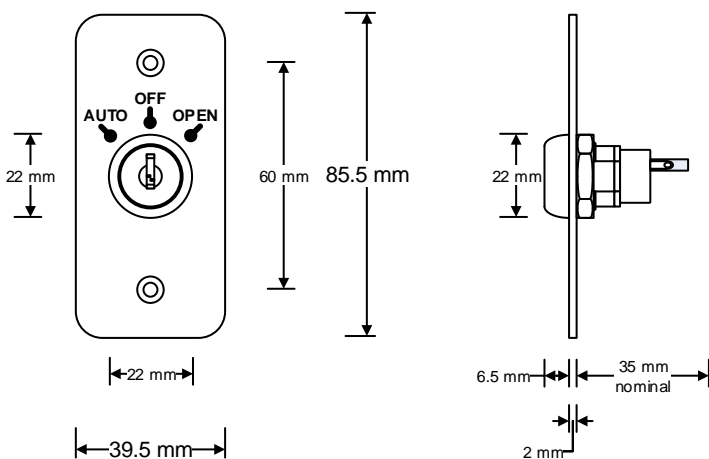


- 3 Position
- Maintained Contact
- Laser Etched Legends
- 2 Keys Supplied
- Keyed Alike as Standard

**IMPORTANT: This product is for use in 12Vdc and 24Vdc applications only and should only be installed by a qualified person**

**Technical**

Life	10,000 Make and break cycles
Indexing	-45°, 0, 45°
Contact Rating	4A 125 Vac / 28Vdc
Keys	Silver plated / Brass
Tumbler Mechanism	4 Disc tumbler cylinder
Lock	Bright nickel plated alloy
Insulation Resistance	<500M-Ohms typ.

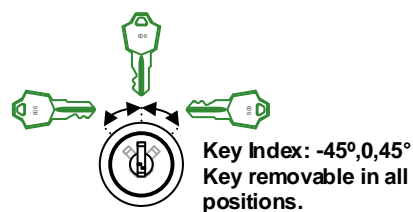

**Specification: (panel)**

Plate Material	Stainless Steel (2mm)
Legend	AUTO/OFF/OPEN

**Ordering information:**

3E0663-1NS

Keyswitch, 3 position, maintained contact, narrow stile, SSS, laser etched AUTO/OFF/OPEN, key:606