



3E0660-1

**Overview**

The 0660-1 keyswitch offers high reliability at an economical price. Momentary contact, spring return providing 1 x normally open, 1 x normally closed circuit and 1 x common.


Key is removable in the ON position only.

This product comes flush mount, complete with 2 keys, screws and a galvanised steel backbox.

The keyswitch is keyed alike as standard. Keyed to differ are also available.

Legends are laser etched, providing permanent and clear text.

**Dimensions (mm) :**

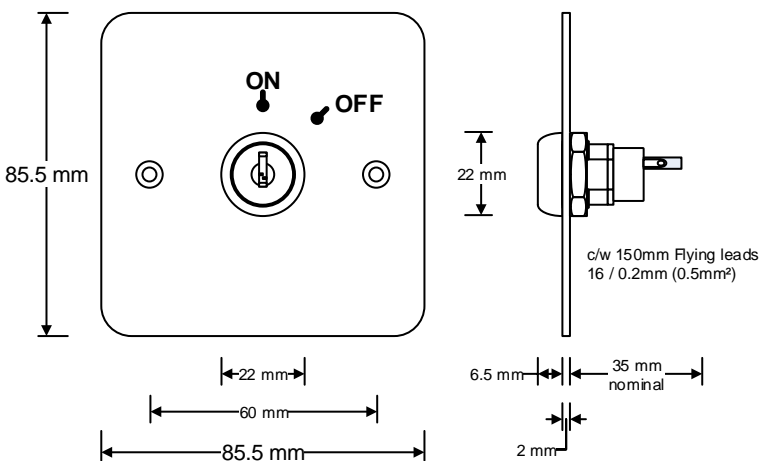


- Momentary Contact
- Key Removable in ON Position Only
- Laser Etched Legend
- 2 Keys Supplied
- Keyed Alike As Standard

**IMPORTANT: This product is for use in 12Vdc and 24Vdc applications only and should only be installed by a qualified person**

**Technical (switch)**

Insulation Resistance	<500M – Ohms typ.
Life	10,000 Make and Break Cycles
Contacts Rating	4A 125Vac / 28Vdc
Indexing	45°
Keys	Nickel Plates Brass
Tumbler Mechanism	4 Disc tumbler cylinder
Contacts / Terminals	Silver Plated / Brass



**Key Index: 45°  
Key removable in ON position only.**

**Specification: (panel)**

Material	Stainless Steel (2mm)
Legend	ON/OFF

**Ordering information:**

3E0660-1

Keyswitch, momentary contact, 1 gang, SSS, laser etched ON/OFF, key:614