



3E0750N-DP


Overview

The 3E0750N-DP is designed for emergency use only, upon activation of the resettable panel, power is permanently removed to the electronic locking device thus ensuring the door is unlocked allowing free egress.

Compliant to EN1154-11 and equipped with a deformable panel for ease of reset and test key for periodical testing. The product is supplied with push on connectors ensuring ease of commissioning.

The unit is available for flush or surface mount installations with a range of accessories to compliment.

Dimensions (mm) :

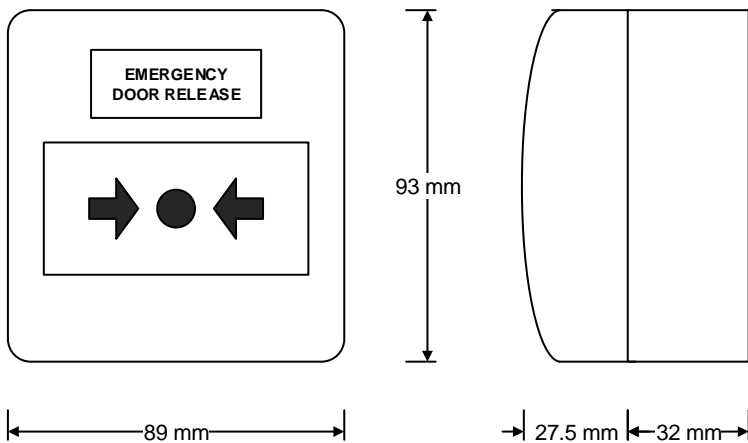


- Proven Reliability
- Emergency Override
- EN54 Compliant
- Double Pole
- Resettable

IMPORTANT: This product is for use in 12Vdc and 24Vdc applications only and should only be installed by a qualified person

Technical Data

Voltage	30Vdc Max
Current Rating	2A Max
Ingress Protection	IP24D
Operating Temperature	-10°C to 55°C
Weight	110/160g
Legend	EMERGENCY DOOR RELEASE
Dimensions	93 x 89 x 59.5mm
Material	ABS Polymer Carbonate
Finish	Green RAL6016

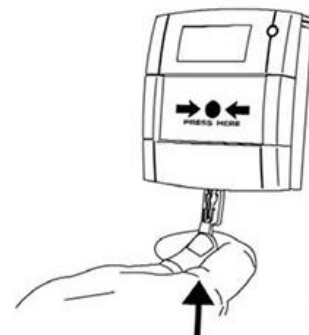

Ordering information:

3E0750N-DP

Double pole Resettable breakglass, Surface mount, Green